



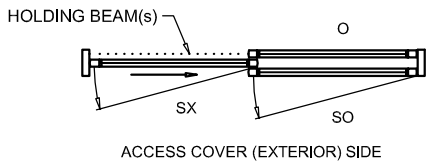


NABCO Entrances Inc.
 S82 W18717 Gemini Drive Muskego, WI 53150
 www.nabcoentrances.com 1-877-622-2694

JOB NAME: _____
 LOCATION: _____
 DISTRIBUTOR: _____
 DOOR #: _____ DATE: _____
 SHEET _____ OF _____


WHISPER SLIDE
GT1175-18R
 SINGLE SLIDE
 RIGHT HAND
 FIXED
 POCKETED

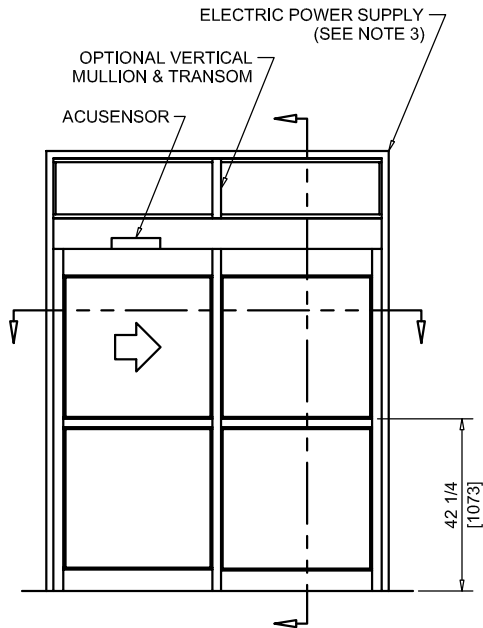

ACCESS COVER (EXTERIOR) SIDE
 EXTERIOR ELEVATION/PLAN

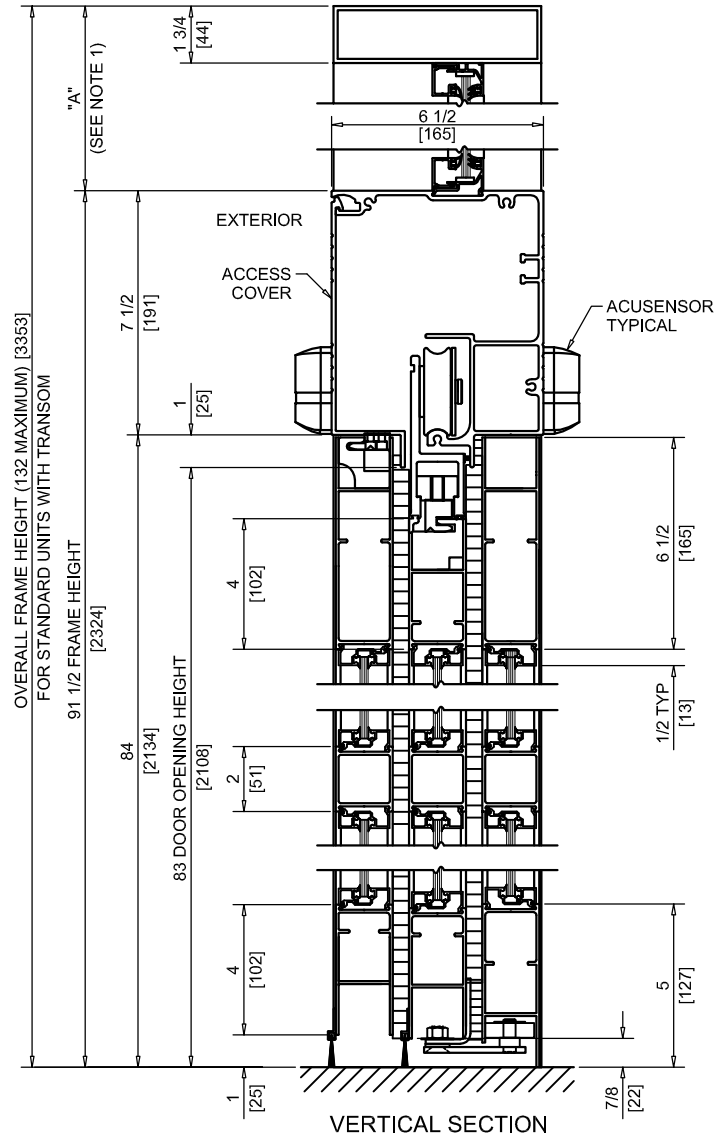

VERTICAL SECTION

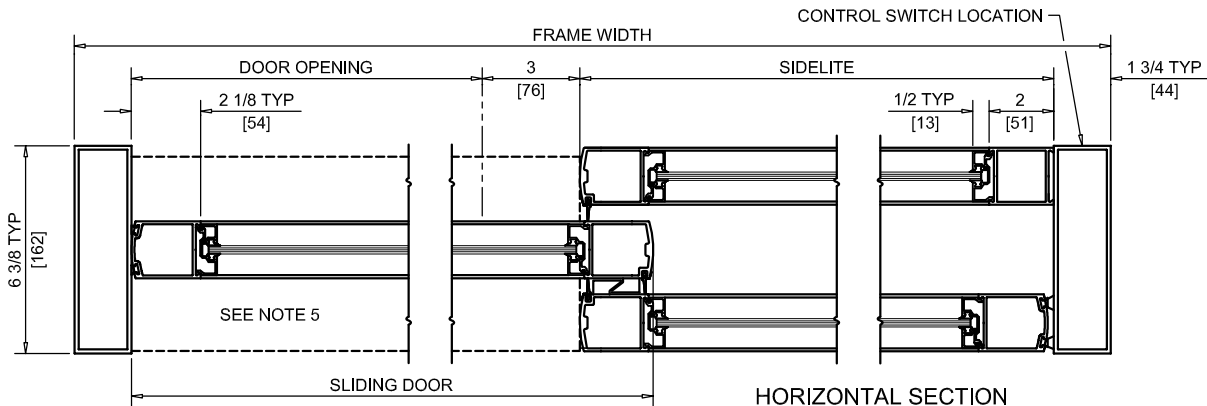

HORIZONTAL SECTION

NOTES:

1. TRANSOM HEIGHT (DIMENSION "A") IS DETERMINED PER JOB REQUIREMENTS.
2. TRANSOM GLAZING IS SURFACE APPLIED FOR ALL GLASS THICKNESSES.
3. POWER TO HEADER WILL BE 115VAC, 5 AMP PER OPERATOR PROVIDED BY ELECTRICAL CONTRACTOR.
4. STANDARD LOCATION OF LOCK IS 35" FROM FINISH FLOOR TO CENTERLINE OF KEY CYLINDER.
5. 1/4 X 7 THRESHOLD THROUGH DOOR OPENING (AS SHOWN WITH DASHED LINES) IS OPTIONAL.
6. MASONRY OPENING EQUALS FRAME WIDTH +1/2" AND FRAME HEIGHT +1/4".
7. ONE SET OF HOLDING BEAMS AT 21" AFF STANDARD. SECOND SET AT 51" AFF IS OPTIONAL.

DOOR OPENING	FULL BREAKOUT OPENING	FRAME WIDTH	SLIDING DOOR	SIDELITE
36" [914]	39" [991]	7'-0" [2133]	41 1/4" [1047]	41 5/16" [1049]
42" [1066]	45" [1143]	8'-0" [2438]	47 1/4" [1200]	47 5/16" [1201]
44" [1117]	47" [1194]	8'-6" [2590]	49 1/4" [1250]	51 5/16" [1303]
48" [1219]	51" [1295]	9'-0" [2743]	53 1/4" [1352]	53 5/16" [1354]